


# ASSEMBLY INSTRUCTIONS

Ref. no. 0458-395-0241

## COMPONENTS

|                                                                                     |       |     |       |                    |
|-------------------------------------------------------------------------------------|-------|-----|-------|--------------------|
|    | _____ | 1 x | _____ | 03-02787           |
|    | _____ | 1 x | _____ | 03-02786           |
|   | _____ | 1 x | _____ | 03-02783           |
|  | _____ | 1 x | _____ | 03-02785           |
|  | _____ | 1 x | _____ | Allen bolt M5x10   |
|  | _____ | 1 x | _____ | Allen bolt M5x16   |
|  | _____ | 8 x | _____ | Allen bolt M8x16   |
|  | _____ | 1 x | _____ | Tube end cap       |
|  | _____ | 8 x | _____ | Flange lock nut M8 |
|  | _____ | 1 x | _____ | Magnet             |

  
Bolt bag  
Bar nose steering


# BAR NOSE STEERING

## SAW UNITS

## ASSEMBLY: BAR NOSE STEERING


1

-  — 1 x — Allen bolt M5x16 or M5x10
-  — 4 x — Allen bolt M8x16
-  — 4 x — Flange lock nut M8
-  — 1 x — Magnet

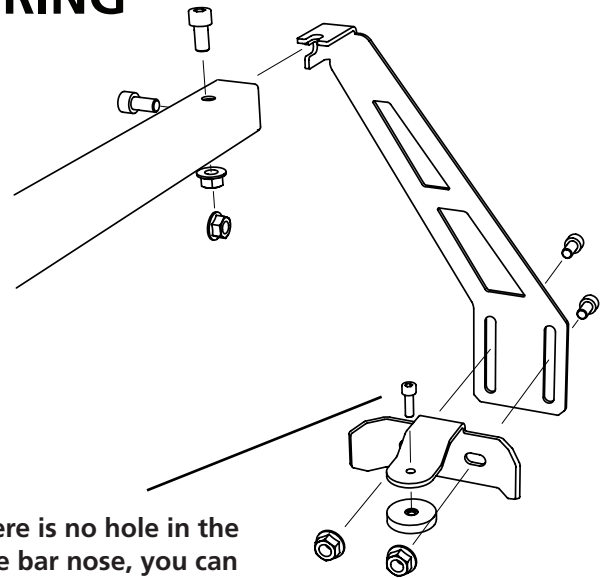


2

-  — 2 x — Allen bolt M8x16
-  — 2 x — Flange lock nut M8

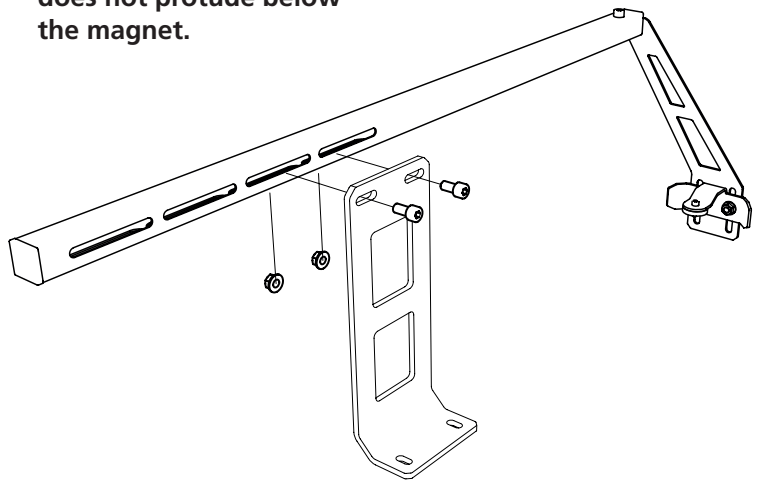

3


Fit the tube end cap to the bar nose steering tube.

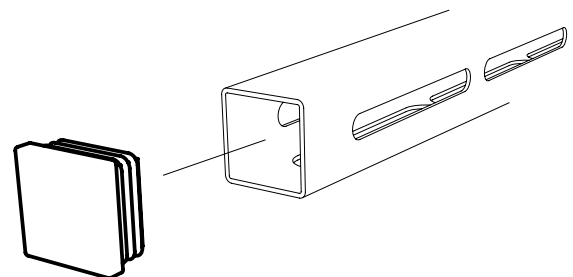

## ASSEMBLY: BAR NOSE STEERING


Installing the bar nose steering onto a chainsaw carriage.

-  — 2 x — Allen bolt M8x16
-  — 2 x — Flange lock nut M8

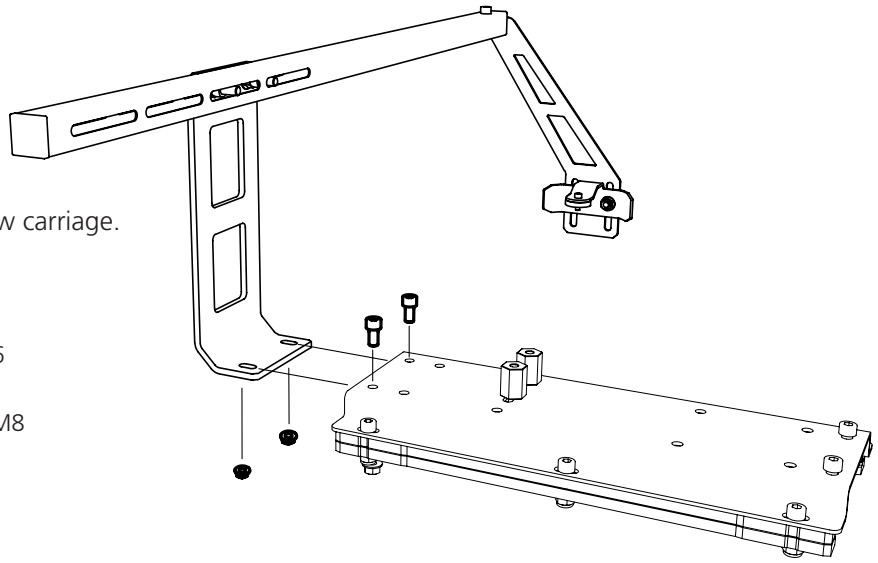


Installing the bar nose steering onto an electric saw carriage.

-  — 2 x — Allen bolt M8x16
-  — 2 x — Flange lock nut M8

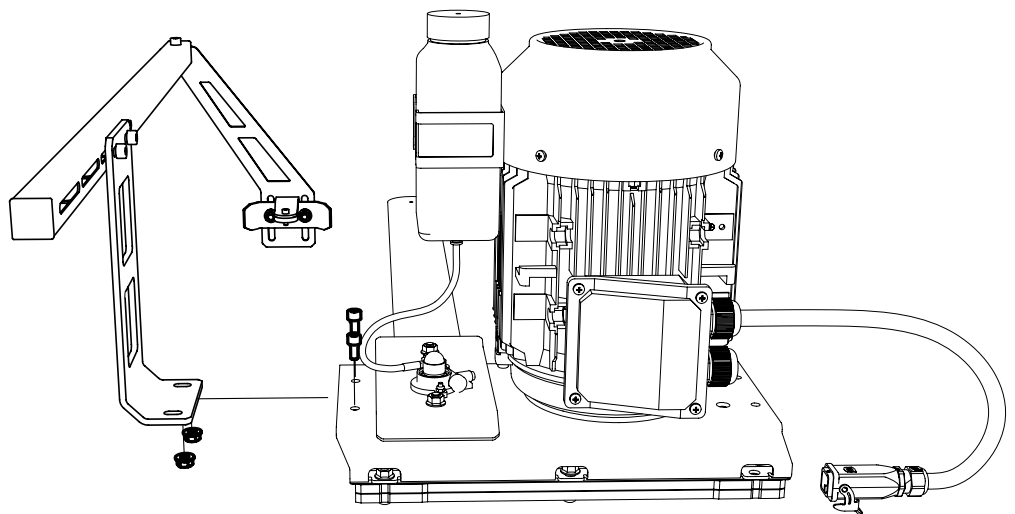

## ADJUSTMENTS

With the magnet holder on the bar nose steering you can adjust the the bar nose attachment in height and sideways.

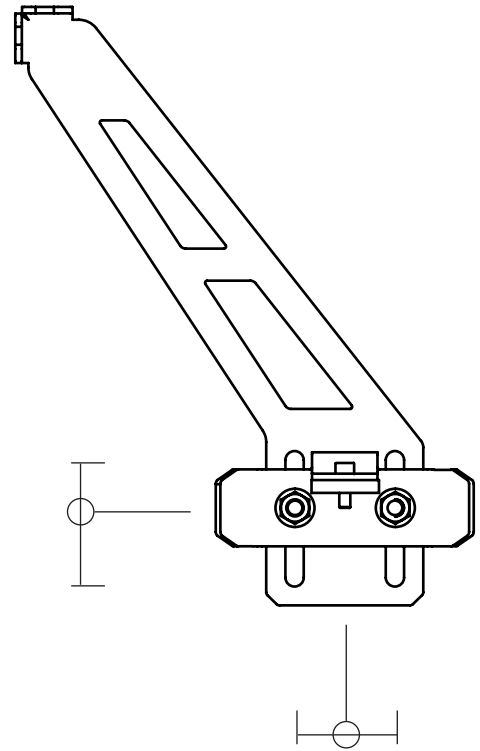

In the tube of the bar nose steering there are oblong holes. Adjust the position of the bar nose steering tube, so that the bolt through the magnet comes into place in the hole in the guide bar nose.

**If there is no hole in the guide bar nose, you can use a shorter bolt that does not protude below the magnet.**

